

Dear Customer,

Thank you for purchasing Takstar E136 portable amplifier. Please read the user manual carefully before operation and keep it for reference in future. If you have any question or suggestion, please contact our local dealer.

■ Features

- The portable amplifier combining microphone and power amplifier together to suit for teaching and tour guide
- Digital amplifying technology, up to 10W peak output power
- Rear earth material speaker, light weight, wonderful sound, high volume level
- Light weight and compact headworn microphone for wearing in a long time
- LINE IN audio input function; The amplifier can be used as a multimedia speaker cabinet
- High capacity Li-ion battery; charging 4h lasts for about 15h operation
- Shoulder hanging or waist wearing for convenient application

■ Product content

Amplifier.....	1pc
Headworn microphone.....	1pc
Micro USB charging cable.....	1pc
Belt clip.....	1pc
Strap.....	1pc
User manual.....	1pc

■ Application

Teaching, tour guide, training, promotion, propaganda

■ Specification

Amplifier:



Frequency Response: 90Hz-12kHz	Charging: DC 5V $\bar{\square}$ 600mA
Peak Power: 10W	Charging Time: approximate 4h
Speaker Impedance: 4Ω	Operation Time: approximate 15h
Battery Type: Li-ion battery	Net Weight: approximate 175g
Battery Specification: 3.7V/2000mAh	Dimension: 92x81x38mm

Handheld Microphone::

Cartridge: back electret cartridge	Frequency Response: 60Hz-16kHz
Polar Pattern: unidirectional	Sensitivity: -44dB to -47dB (0dB=1V/Pa/m at 1kHz)

Note: The above data are tested by the Takstar laboratory and Takstar has the right of final interpretation.

■ Function

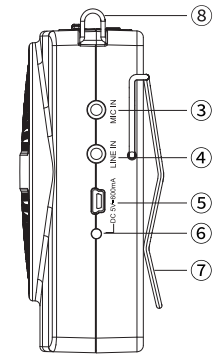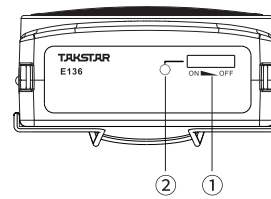

- ① Power switch: turn the power switch to ON direction. It sounds Da. This means the amplifier is turned on. Turn the power switch to ON continuously to increase volume. Turn the power switch to OFF continuously to decrease volume. When it sounds Da, the amplifier is turned off.
- ② Operation LED: it keeps lighting up green means sufficient power supply, but red means low power supply, please recharge in time.
- ③ MIC IN connector: connect the headworn microphone with this connector to enter into vocal reinforcement status. Please keep the microphone away with the amplifier to prevent from feedback.
- ④ LINE IN connector: connect cell phone or PAD or MP3 player via Ø3.5mm audio cable. The amplifier can be used as active speaker cabinet.
- ⑤ Charging input connector: connect USB charging cable with this connector, and the other end with USB output charger (e.g. cell phone charger, PC USB interface, etc) to recharge the battery.
- ⑥ Charging LED: the LED keeps lighting up red means the amplifier is being recharged, and green means recharged fully (Note: before operation for the first time, please recharge the amplifier fully. After being recharged fully, please stop recharging to avoid over-charging. If the amplifier will not be used for a long time, please recharge it every half year to prevent from the battery damage).
- ⑦ Belt clip: it is used for waist wearing application.
- ⑧ Hanging buckle: it is used for wearing on the shoulder.

■ Caution

To avoid electric shock, over temperature, catching fire, explosion, mechanical risk and hurt or property loss caused by improper use, please read the following items carefully before operation:

1. Please check if the power of the connected equipment matches with that of this product before operation. Adjust the volume to proper level during operation. Do not operate at over-power or high volume level for a long time to avoid abnormal functioning or hearing loss.
2. If abnormal phenomenon (smoke, abnormal smell) happens, please turn off the power switch and disconnect the power plug with power socket, and send the product to local dealer for maintenance.
3. The product and accessories should be put in dry and ventilated place rather than humid or dusty environment. Prevent the product from fire, liquid, rain, water, over-colliding, throwing, vibrating, vent hole covered to avoid function damage.
4. When the product needs to be installed on wall or ceiling, please fix it tightly to avoid dropping risk.
5. Please abide by safety rules during operation. Do not use the product in the place prohibited by regulation or law to avoid accident.
6. Do not disassemble or repair the product by yourself to avoid personal injury. If you have question or need service, please contact the local dealer.
7. The applicable altitude and climate condition of this product is subject to the power supply equipment.

<p>注意事项:</p> <ol style="list-style-type: none"> 1. 本单为保修凭证, 请用户妥善保管, 如有遗失, 恕不保修或退换。 2. 保修期限制: 购买之日起十二个月内。 3. 除了不可抗力事件损坏外, 由本公司负责, 免费维修。 4. 如属保管不善或使用不当造成的损坏, 维修点将酌情收费。 5. 擅自拆卸维修者, 不予保修。 6. 以上保修条款仅限于中国市场适用 (不包含港澳台地区)。 	<h3>产品服务保证书</h3>																					
	姓名: _____ 电话: _____ 地址: _____ 商品: _____ 型号: _____ 购买日期: _____ 年 _____ 月 _____ 日																					
	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 60%;">维修记录栏(由维修员填写)</th> <th style="width: 20%;">维修员签名</th> <th style="width: 20%;">日期</th> </tr> </thead> <tbody> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> </tbody> </table>	维修记录栏(由维修员填写)	维修员签名	日期																		
维修记录栏(由维修员填写)	维修员签名	日期																				
	◆ 广东得胜电子有限公司 ◆ 电话: 400-6828-333 ◆ 地址: 广东省惠州市博罗县龙溪街道高潭一路2号																					