

尊敬的用户：

欢迎使用EKC影K音响系统全频系列音箱。此款产品由1只中置音箱、2只前置音箱和2只环绕音箱组成。箱体轻巧美观，标配吊架利于吊挂安装；音质方面，声音通透自然、层次清晰。配合EKC-7HD影K一体机和EKC-6SW有源超低音音箱组成5.1影K系统使用。使用前请您仔细阅读说明书，以便能正确的操作使用。

若存在有疑问或者您有宝贵的建议，可通过拨打得胜官方服务热线 400 6828 333 或使用微信扫描二维码关注得胜官方公众号与我们联系。

**产品特性**

- EKC-3TH中置音箱，采用2只语音清晰度较高的3寸纸盆扬声器和2只丝膜球顶高音。能准确、真实地刻画影片中人物的个性语言，人声准确干净。
- EKC-3TH前置音箱，由2只3寸纸盆中低频扬声器和1只25芯丝膜球顶扬声器组成两分频系统，立体音质表现好，精准再现原声细节。
- EKC-3TH环绕音箱，采用2只频响宽和灵敏度高的3寸纸盆全频扬声器单元，体积小、声压大。环绕音质表现好，精准再现背景声的每个细节。

技术参数

参数 \ 音箱	中置音箱	前置音箱	环绕音箱
额定功率	40W	40W	30W
额定阻抗	16Ω	16Ω	16Ω
频率响应(-10dB)	100Hz-20KHz	100Hz-20KHz	100Hz-18KHz
灵敏度(1W/1m)	94dB	92dB	92dB
指向性	H70°×V 90°	H90°×V 75°	H100°×V 85°
接线方式	按压式接线盒, 接线端子 (红+, 黑-)		
箱壳	9厘中纤板		
单元组成	LF:3"20芯中低音×2 HF:25芯丝膜高音×2	LF:3"20芯中低音×2 HF:25芯丝膜高音×1	3"全频扬声器×2
表面处理	哑黑贴皮		
产品尺寸(W*D*H)	446*125*111mm	111*125*308mm	111*125*230mm
产品净重(Kg/只)	3.5	2.7	1.9

注意事项


1. 建议匹配TAKSTAR品牌的EKC-7HD影K一体机和EKC-6SW有源超低音音箱（组成5.1影K系统）使用。
2. 确保功率放大器和音箱的功率、阻抗相匹配，过高功率的失衡搭配易导致设备损坏。
3. 音箱配合壁架吊挂安装或贴橡胶脚垫放置桌面，音箱正面朝向听音区。
4. 音箱的安装应固定牢靠，并选择安装在不易碰触的位置。
5. 搬运音箱时，请小心轻放，保护好音箱不受损坏。

适用场合

适用于家庭，影吧、影K、多媒体会议室

标准配置

EKC-3TH中置音箱*1	壁架*5
EKC-3TH前置音箱*2	说明书*1
EKC-3TH环绕音箱*2	橡胶脚垫*16

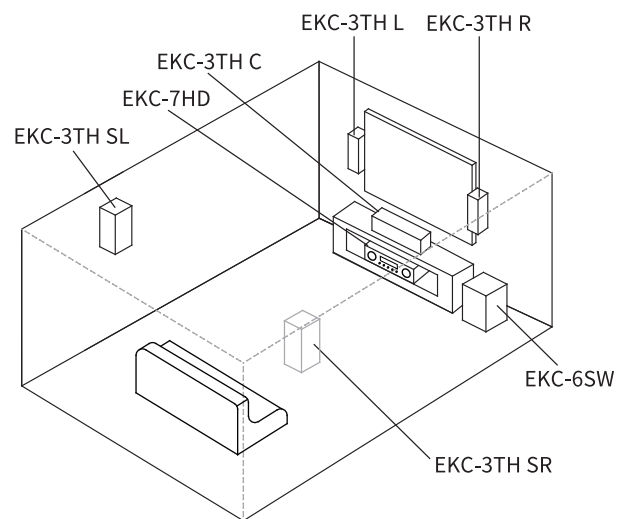系统连接示意图

Dear Customer,

Thank you for purchasing EKC cinema/Karaoke system full range speaker cabinet. This series consists of one middle speaker cabinet, two front speaker cabinet and two surround speaker cabinet. The full range speaker cabinets feature compact enclosure, standard configuration to suit for installation, natural and clear sound. They are tailored to be used with EKC-7HD cinema/Karaoke combo unit and EKC-6SW active subwoofer to form 5.1 cinema/Karaoke system.

Please read the user manual carefully before operation and keep it for reference in future. If you have any question or suggestion, please contact our local dealer.

Features

- EKC-3TH middle speaker cabinet features two 3 inch cone speakers and two silk dome tweeters to reproducing original sound accurately
- EKC-3TH front speaker cabinet features two 3 inch MFLF speakers and one 25mm silk dome speaker to form two way system and reproducing detailed stereo
- EKC-3TH surround speaker cabinet features two 3 inch full range speakers to reproducing, compact enclosure, wide frequency response, high sensitivity, high SPL to reproduce detailed surround sound


Specification

Speaker Cabinet Specification	Middle Speaker Cabinet	Front Speaker Cabinet	Surround Speaker Cabinet
Rated Power	40W	40W	30W
Rated Impedance	16Ω	16Ω	16Ω
Frequency Response(-10dB)	100Hz-20KHz	100Hz-20KHz	100Hz-18KHz
Sensitivity(1W/1m)	94dB	92dB	92dB
Directivity	H70°×V 90°	H90°×V 75°	H100°×V 85°
Connection	Binding post, wiring(red+, black-)		
Enclosure	9mm MDF		
Unit	LF:3"20mm MFLF×2 HF:25mm silk dome HF×2	LF:3"20 mm MFLF×2 HF:25 mm silk dome ×1	3"full range speaker×2
Finish	Black leather finish		
Dimension(W*D*H)	446*125*111mm	111*125*308mm	111*125*230mm
Net Weight(Kg)	3.5	2.7	1.9

Caution

- 1.It is recommended to use the full range speaker cabinets with EKC-7HD cinema/Karaoke combo unit and EKC-6SW active speaker cabinet (to form a 5.1 cinema/Karaoke system) together.
- 2.Make sure the power and impedance of speaker cabinet match with that of power amplifier to avoid damage.
- 3.Use wall stand for installation or rubber pads for floor application. Keep the speaker cabinet front side to the audience area.
- 4.Install the speaker cabinet tightly.
- 5.Handle with care during moving the speaker cabinets.

System Installation

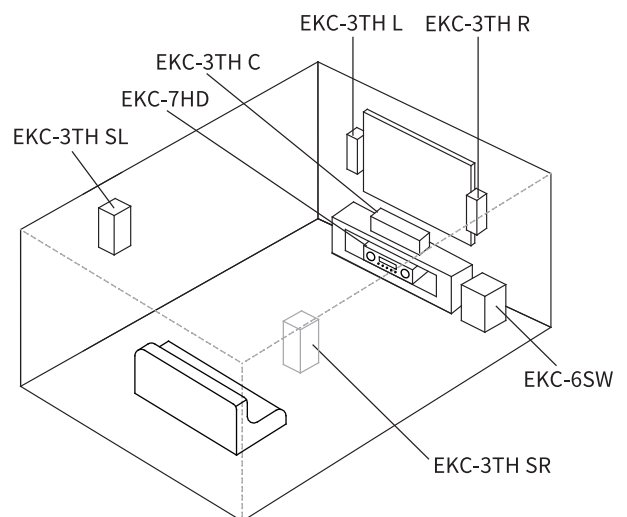

Application

Home cinema, cinema, Karaoke, multimedia conference room

Product Content

- EKC-3TH middle speaker cabinet *1
- EKC-3TH front speaker cabinet *2
- EKC-3TH surround speaker cabinet *2
- Wall installation stand *5
- User manual *1
- Rubber pad *16