

尊敬的用户：

感谢您选购得胜DM 2300 (GEN 2)专业动圈麦克风，为了您能够更好的了解使用本产品，建议您在使用前仔细阅读本说明书。

若存在有疑问或者您有宝贵的建议，可通过拨打得胜官方服务热线400 6828 333或微信扫描二维码关注得胜官方公众号与我们联系。



产品特性

- 专业动圈麦克风，为舞台演出、主持演讲和家庭KTV等场景打造；
- 升级Φ31mm动圈音头，中高频明亮，人声更优秀；
- 心型拾音聚焦主音源，有效抑制回馈啸叫，减少背景噪音；
- 全金属本体，表面烤漆工艺，握感舒适，经久耐用；
- 铜焊网头，多棱形防滚动设计，保护麦克风意外跌落损伤；
- 配置推动式开关，可快速关闭麦克风信号；
- 双芯屏蔽线有效降低电磁干扰，信号传输稳定可靠；
- 附赠转换插头，多接口适配连接更便捷。

标准配置

- 麦克风.....1支
- 话筒线.....1条
- 转换头.....1个
- 防风棉.....1个
- 说明书.....1份

适用场合


- 舞台演出、主持演讲和家庭KTV等场合

技术参数

- 单体：动圈式
- 指向性：心型指向
- 频率响应：50Hz-18kHz
- 灵敏度：-52dB±3dB (0dB=1V/Pa at 1kHz)
- 输出阻抗：250Ω±30% (at 1kHz)
- 净重：约348g
- 尺寸：Ø50\*184mm

注：以上数据由得胜实验室测试得到，并拥有最终解释权！

频率响应曲线图

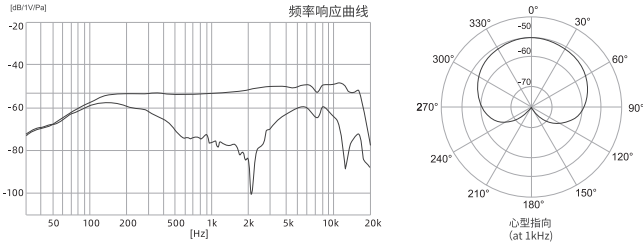


功能示意


1. 开关：拨至“ON”方向开启麦克风，拨至“OFF”方向关闭麦克风。
2. XLR接口：通过XLR音频线与声卡、调音台等音频设备连接。

使用说明

1. 麦克风与线材连接时，将线材卡侬头一端对准麦克尾部三针插入，直到卡侬上的扣键“哒”的一声定位。
2. 使用时，应对准麦克风网头顶部方向讲话，人与麦克风建议保持5-10厘米的拾音距离。
3. 麦克风与连接线分开时，可握住线材插头，同时按压扣键，然后将插头从麦克风底部接口拔出。
4. 将麦克风线材另一端与调音台、功放、声卡等设备连接。

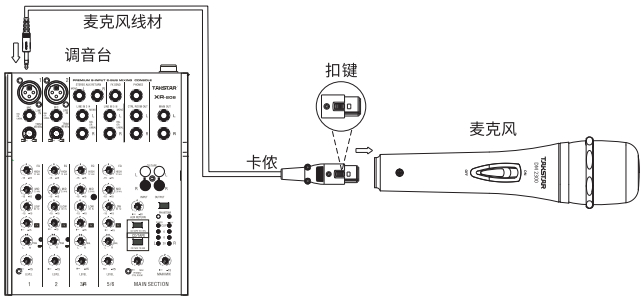

5. 使用时应先将设备音量调小，再将音量从小到慢慢调节至合适，以免声压过大对扬声器产生冲击。
6. 手不要握在麦克风网头上，尽可能的拉开麦克风与扬声器的距离，避免麦克风和扬声器相对，以免影响麦克风音质及有效控制回馈啸叫。

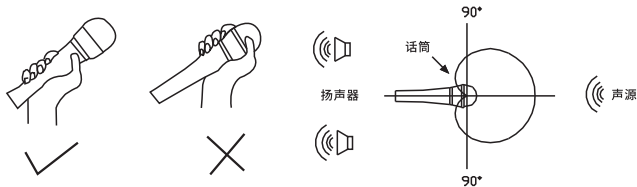

安全警示

为避免电击、高温、着火、辐射、爆炸、机械危险以及使用不当等可能造成的人身伤害或财产损失，使用本产品前，请仔细阅读并遵守以下事项：

1. 使用产品时请确认所连设备与本产品是否匹配以及合理调整音量大小，不要在超过产品功率及大音量下长时间使用，以免造成产品异常；
2. 使用中若发现有异常（如冒烟、异味等），请立即关闭电源开关并拔掉电源插头，然后将产品送售后服务网点检修；
3. 本产品及配件都应放置在室内干燥通风处，请勿长期存放在潮湿、灰尘多的环境，使用中避免靠近火源、雨淋、进水、过度碰撞、抛掷、振动本机及覆盖通风孔，以免损坏其功能；
4. 若产品需要固定于墙壁或天花板时，请确保固定到位，防止因固定强度不足导致产品发生跌落危险；
5. 使用该产品时需遵守相关安全规定，法律法规明确禁止使用场合请勿使用本产品，以免导致意外事故；
6. 请不要自行拆机改装或维修，以防止出现人身伤害，如有问题或服务需求请联系当地售后服务网点跟进处理。

环保说明

| 产品中有毒有害物质或元素的名称及含量标识表                                                                                                                                                        |           |        |        |              |            |              |                 |                  |                 |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|--------|--------|--------------|------------|--------------|-----------------|------------------|-----------------|
| 部件名称                                                                                                                                                                         | 有毒有害物质或元素 |        |        |              |            |              |                 |                  |                 |
|                                                                                                                                                                              | 铅 (Pb)    | 汞 (Hg) | 镉 (Cd) | 六价铬 (Cr(VI)) | 多溴联苯 (PBB) | 多溴二苯醚 (PBDE) | 邻苯二甲酸二正丁酯 (DBP) | 邻苯二甲酸二异丁酯 (DIBP) | 邻苯二甲酸丁基苯酯 (BBP) |
| 塑料部件                                                                                                                                                                         | ○         | ○      | ○      | ○            | ○          | ○            | ○               | ○                | ○               |
| 金属部件                                                                                                                                                                         | ×         | ○      | ○      | ○            | ○          | ○            | ○               | ○                | ○               |
| 电路板组件                                                                                                                                                                        | ×         | ○      | ○      | ○            | ○          | ○            | ○               | ○                | ○               |
| 线缆                                                                                                                                                                           | ×         | ○      | ○      | ○            | ○          | ○            | ○               | ○                | ○               |
| 本表格依据SJ/T 11364的规定编制。<br>○: 表示该有害物质在该部件所有均质材料中的含量均在 GB/T 26572规定的限量要求以下。<br>×: 表示该有害物质至少在该部件的某一均质材料中的含量超出 GB/T 26572规定的限量要求。<br>此标志为产品的环保使用期限标志，且此环保使用期限只适用于产品正常工作的温度和湿度等条件。 |           |        |        |              |            |              |                 |                  |                 |



### ■ Preface

Dear Customer,

Thank you for purchasing our product. Read this manual thoroughly to use the product properly.

If you have any questions or suggestions, please contact our local sales service.

### ■ Features

- Professional dynamic microphone, designed for stage performances, hosting speeches and home KTV.
- Upgraded  $\Phi 31\text{mm}$  dynamic capsule delivers bright mid-high frequencies and superior vocal reproduction.
- Cardioid pickup focuses on main sound source, effectively suppresses feedback howling and reduces background noise.
- Full-metal body with baking-finish paint, delivering comfortable grip and long-lasting durability.
- Copper-welded mesh head with polygonal anti-roll design protects the microphone from accidental drop damage.
- Push-type switch quickly cuts off microphone signal.
- Dual-core shielded cable effectively reduces electromagnetic interference, ensuring stable and reliable signal transmission.
- Includes a 6.3mm to 3.5mm adapter and its multi-interface adaptation makes connection more convenient.

### ■ Package Contents

- 1 × Microphone      1 × Microphone Cable      1 × 6.3mm to 3.5mm Adapter  
1 × Windscreen      1 × User Manual

### ■ Applications



- Stage performances, hosting and speeches, and home KTV.

### ■ Specifications

- Transducer: Dynamic
- Polar Pattern: Cardioid
- Frequency Response: 50Hz-18kHz
- Sensitivity:  $-52\text{dB} \pm 3\text{dB}$  ( $0\text{dB}=1\text{V/Pa}$  at 1kHz)
- Output Impedance:  $250 \Omega \pm 30\%$  (at 1kHz)
- Net Weight: Approx. 348g
- Dimensions:  $\Phi 50 \times 184\text{mm}$

Note: The above data are measured by Takstar laboratory which has the final interpretation right!

### ■ Frequency Response Curve

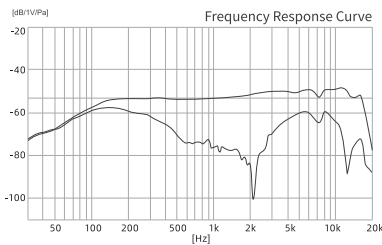


### ■ Function Descriptions

1. Switch: Switch to "ON" or "OFF" position to power on/off the mic respectively.
2. XLR Interface: Connect the mic to audio devices such as audio interfaces and mixers via an XLR audio cable.


### ■ Operating Instructions

1. When connecting the mic to the XLR cable, align the XLR connector end of the cable with the three-pin interface at the tail of the mic. Insert it until you hear a click to lock it in place.
2. When using the mic, speak towards the top of the mic grille. It is recommended to maintain a pickup distance of 5-10 centimeters between your mouth and the mic.

3. When disconnecting the mic from the cable, hold the plug of the cable and press the latch. Then, gently pull the plug out from the bottom interface of the mic.
4. Connect the other end of the microphone cable to devices such as mixers, power amplifiers and sound cards.

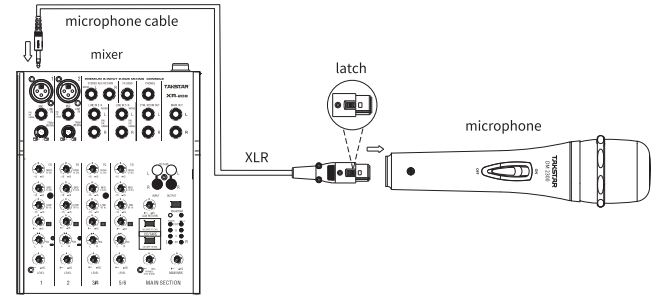

5. Start with low device volume and gradually increase it to avoid excessive sound pressure on the speakers.
6. Avoid gripping the mic grille and maintain a distance between the mic and speakers to prevent interference, ensuring optimal sound quality and feedback control.

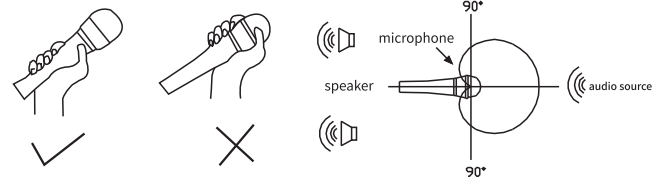

### ■ Safety Instructions

To avoid electric shock, overheat, fire, radiation, explosion, mechanical risk and injury or property loss due to improper use, please read and observe the following items before use:

1. Please check if the power of the connected equipment matches with that of this product before operation. Adjust the volume to proper level during operation. Do not operate at over-power or high-volume level for extended time to avoid product malfunction.
2. If there is any abnormality during use (e.g., smoke, strange odor), please kill the power switch and unplug from power source, then send the product to the local after-sales service for repair.
3. Keep this product and its accessories in a dry and ventilated area. Do not store in a humid or dusty area for extended time. Keep away from fire, rain, liquid intrusion, bumping, throwing, vibrating, or from blocking any ventilation openings, to prevent malfunction.
4. The product must, when installed on walls or ceilings, be fixed firmly in place at adequate strength to prevent from falling.
5. Please abide by safety rules during operation. Do not use the product in places prohibited by laws or regulations to avoid accident.
6. Do not disassemble or repair the product by yourself to avoid injury. If you have any questions or require any services, please contact our local after-sales service.

#### 注意事项:

1. 本单为保修凭证, 请用户妥善保管, 如有遗失, 恕不保修或退换。
2. 保修期限: 购买之日起十二个月内。
3. 除了不可抗力事件损坏外, 由本公司负责, 免费维修。
4. 如属保管不善或使用不当造成的损坏, 维修点将酌情收费。
5. 擅自拆卸维修者, 不予保修。
6. 以上保修条款仅限于中国市场适用 (不包含港澳台地区)。

#### 产品服务保证书

姓名: \_\_\_\_\_ 电话: \_\_\_\_\_ 地址: \_\_\_\_\_  
商品: \_\_\_\_\_ 型号: \_\_\_\_\_ 购买日期: \_\_\_\_\_ 年 \_\_\_\_\_ 月 \_\_\_\_\_ 日

| 维修记录栏(由维修员填写) | 维修员签名 | 日期 |
|---------------|-------|----|
|               |       |    |
|               |       |    |
|               |       |    |
|               |       |    |
|               |       |    |
|               |       |    |
|               |       |    |

◆ 广东得胜电子有限公司 ◆ 电话: 400-6828-333 ◆ 地址: 广东省惠州市博罗县龙溪街道富康一路2号