

尊敬的用户：

感谢您选购TAKSTAR HM-200W 屏显版无线头戴麦克风，为了您能够更好地了解使用本产品，建议您在使用前仔细阅读本说明书。


若存在有疑问或者您有宝贵的建议，可通过拨打得胜官方服务热线 400 6828 333 或使用微信扫描二维码关注得胜官方公众号与我们联系。



产品特性

- 采用UHF低功耗无线技术，抗干扰能力强，传输距离可达40米；
- 可调频，可支持40台机器同时使用，不串频，不干扰；
- 麦克风采用电容音头，灵敏度高，语音清晰自然，说话更轻松；
- 内置锂离子充电电池，使用时间可达6小时。

无线头戴麦克风示意图

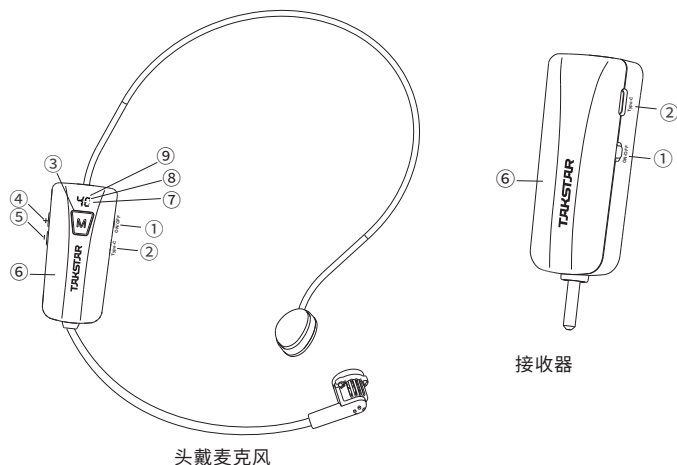

- ① 电源开关：向ON方向推动，蓝灯⑥亮，表示麦克风已经进入开机状态；向OFF方向推动，蓝灯⑥熄灭，表示耳麦已经进入关机状态；
- ② 充电插口：将Type-C充电线插入此孔，另一端连接通用的USB输出充电器，即可进行充电，充电指示灯红灯亮；
- ③ 频道切换键：点按进入切换频道模式，长按进入配对模式；
- ④ 音量+键：点按逐级增加音量；
- ⑤ 音量-键：点按逐级减小音量；
- ⑥ 指示灯：配对时，蓝灯慢闪；工作状态时，蓝灯长亮；低电时，蓝灯快闪；充电时，红灯常亮，充满后红灯熄灭；
- ⑦ 显示屏：显示工作频道、麦克风音量、功率模式；
- ⑧ 工作频道/麦克风音量：默认显示当前工作频道，有“01-40”共40个工作频道；当点按音量+、-键时，则显示音量大小，有“U1-U9”共9级音量，3秒后回复正常数值；10秒后无任何操作，显示屏将自动熄灭；
- ⑨ 同时点击M按键和“-”按键为低功率，同时显示屏上会显示低功率的提示“E0”，同时点击M按键和“+”按键为高功率，同时显示屏上会显示高功率的提示“E1”（低功率无线使用距离在10米左右，高功率无线使用距离在40米左右）

使用说明

1. 配对连接：打开头戴麦克风电源开关，等待显示屏显示频道状态下，然后长按麦克风“M”键5秒，待显示屏上显示转圈状态，然后打开接收器电源开关，将自动配对连接。
2. 频率调节：已成功配对设备，头戴麦克风频道切换键点按一次(频道显示闪烁)并点按音量键“+”或“-”进行上下频率通道切换（40组频率通道循环切换），接收器自动匹配新频率。

技术参数

- 频率响应：60Hz-16KHz
- 频率范围：630MHz-890MHz
- 工作电压：DC \approx 2.5-5.5V
- 电池规格：锂聚合物电池400mAh
- 充电电压：DC 5V \approx 200mA
- 充电时间：约2.5小时
- 使用时间：6小时
- 灵敏度：-51至-54dB
- 使用距离：空旷地带约40米
- 单机重量：接收器约22g；头戴麦克风约39g

注：以上数据由得胜实验室测试得到，并拥有最终解释权！

注意事项

为避免电击、过高温、着火、辐射、爆炸、机械危险以及使用不当等可能造成的人身伤害或财产损失，使用本产品，请仔细阅读并遵守以下事项：

1. 使用产品时请确认所连接设备与本产品功率是否匹配以及合理调整音量大小，不要在超过产品功率及大音量下长时间使用，以免造成产品异常和耳朵听力损伤；
2. 使用中若发现有异常（如冒烟、异味等），请立即关闭电源开关并拔掉电源插头，然后将产品送经销商检修；
3. 本产品及配件都应放置在室内干燥通风处，勿长期存放在潮湿、灰尘多的环境，使用中避免靠近裸露火源、碰到液体物质、雨淋、产品进水、过度碰撞、抛掷、振动本机及覆盖通风孔，以免损坏其功能；
4. 使用该产品时需遵守相关安全规定，法律法规明确禁止使用场合请勿使用本机，以免导致意外事故；
5. 请不要自行拆机改装或维修，以防止出现人身伤害，如有问题或服务需求请联系当地经销商跟进处理；
6. 本产品适用的海拔及气候条件由选用的供电设备决定。

标准配置

头戴麦克风	1个
接收器	1个
充电线	1个
说明书	1份

适用场合

- 适用于演讲、教学、导游、宣传活动配合扩音器或音箱使用

产品服务保证书

姓名：_____ 电话：_____ 地址：_____

商品：_____ 型号：_____ 购买日期：_____ 年 ____ 月 ____ 日

维修记录栏(由维修员填写)	维修员签名	日期

◆ 广东得胜电子有限公司 ◆ 电话：400-6828-333 ◆ 地址：广东省惠州市博罗县龙溪街道富康一路2号

注意事项：

1. 本单为保修凭证，请用户妥善保管，如有遗失，恕不保修或退换。
2. 保修期限：购买之日起十二个月内。
3. 除了不可抗力事件损坏外，由本公司负责，免费维修。
4. 如属保管不善或使用不当造成的损坏，维修点将酌情收费。
5. 擅自拆卸维修者，不予保修。
6. 以上保修条款仅限于中国市场适用（不包含港澳台地区）。

※本产品相关规格如有变更恕不另行通知。

GB/T 17276-1998 9TM200WS1C




Dear Customer,

Thank you for purchasing TAKSTAR HM-200W Wireless Headworn Microphone (with Display Screen). Please read the user manual carefully before operation and keep it for reference in future. If you have any question or suggestion, please contact our local dealer.

Features

- UHF technology with low power consumption, high anti-interference capability, and use distance up to 40m.
- Frequency modulation; Up to 40 units can be used simultaneously without crosstalk or interference
- Condenser microphone, high sensitivity, clear vocal
- Built-in Li-ion battery lasts for 6h operation

Wireless Headworn Microphone Function Instruction

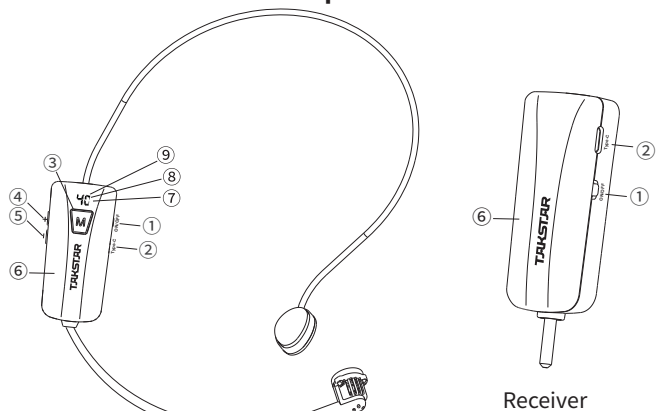

Headworn microphone

Receiver

- ① Power switch: push it to ON, and the blue LED ⑥ lights up. This means the microphone is turned on. Push it to OFF, and the blue LED ⑥ lights off. This means the microphone is turned off.
- ② Charging port: connect one end of Type-C charging cable with this port, and the other end with USB output charger to charge the microphone. The charging LED lights up red.
- ③ Channel switching button: press it shortly to enter into channel switching mode. Keep pressing it to enter into matching mode.
- ④ Volume +: press it shortly to increase the volume level.
- ⑤ Volume -: press it shortly to decrease the volume level.
- ⑥ Indicator: slow blue pulses while pairing; solid blue light during operation; rapid blue flashes if low power; solid red light while charging, and lights off when fully charged.
- ⑦ Display screen: display working channel, mic volume, and power mode.
- ⑧ Working channel/microphone volume: the current working channel is displayed by default, and there are a total 40 working channels "01-40". When you press the volume+ and - buttons, the volume is displayed and returns to normal value after 3 seconds; there are a total 9 levels of volume "U1-U9". After 10 seconds without any operation, the display screen will automatically go out.
- ⑨ Press both [M] and [-] buttons to switch to low power, the screen shows "E0" low-power mode. Press both [M] and [+] buttons to switch to high power, the screen shows "E1" high-power mode. (Use distance is around 10m at low power, or around 40m at high power)

Operation Instruction

1. Pairing: turn on the headworn microphone, wait for the display to show the channel status, then press and hold the microphone [M] button for 5 seconds until the display shows a running circle, and then turn on the receiver to start auto pairing.
2. Frequency adjustment: for the matched equipments, press the channel matching button of headworn microphone once (channel display begins flashing), then press volume key [+]/[-] to change and cycle through 40 frequency channels. The receiver will automatically match the new frequency channel.

Specification

- Frequency Response: 60Hz-16KHz
- Frequency Range: 630MHz-890MHz
- Operation Voltage: DC \approx 2.5-5.5V
- Battery: Li-ion battery 400mAh
- Charging Voltage: DC 5V \approx 200mA
- Charging Time: approximate 2.5h
- Operation Time: 6h
- Sensitivity: -51 to -54dB
- Operation Range: about 40m in open area
- Net Weight: receiver: approximate 22g,
Headworn microphone : approximate 39g

Note: the above data is obtained from the test of Takstar laboratory, and Takstar has the final interpretation right!

Caution

To avoid electric shock, over temperature, catching fire, explosion, mechanical risk and hurt or property loss caused by improper use, please read the following items carefully before operation:

1. Adjust the volume to proper level during operation. Do not operate at high volume level to avoid hearing loss.
2. If abnormal phenomenon (smoke, abnormal smell) happens, please turn off the power switch and disconnect the power plug with power socket, and send the product to local dealer for maintenance.
3. The product and accessories should be put in dry and ventilated place rather than humid or dusty environment. Prevent the product from fire, liquid, rain, water, over-colliding, throwing, vibrating, vent hole covered to avoid function destroyed.
4. Please abide by safety rules during operation. Do not use the product in the place prohibited by regulation or law to avoid accident.
5. Do not disassemble or repair the product by yourself to avoid hurt. If you have question or need service, please contact the local dealer.
6. The applicable altitude and climate condition of this product is subject to the power supply equipment.

Product Content

Headworn microphone	1pc
Receiver	1pc
Charging cable	1pc
User manual	1pc

Application

- Used with amplifier or speaker in speech, teaching, tour guide, propaganda

※The product specification is subject to change without prior notice.