

TAKSTAR® 得勝



扫一扫，了解更多产品
Scan for more
product information

SGC-1000PRO

采访麦克风 Interview Microphone

欢迎选用TAKSTAR SGC-1000PRO采访麦克风，本产品专为摄影、采访、影视制作等场合而设计，可简便安装在摄像机上，操作方便，是摄影录音的最佳伴侣。

在使用之前，请仔细阅读本说明书，以便能更好地发挥该麦克风的优越性能。

Welcome to use TAKSTAR SGC-1000PRO interview microphone. This product is specially designed for photography, interview and video production. Easy to mount on the camera, convenient for use, it is an ideal choice for photography/recording. Please read this manual detailedly before using to make sure the correct operation and exert the optimum performance.

音质出色，拾音夹角小、距离远

Excellent sound performance, narrow pickup angle and long pickup distance

长集音管设计，能有效去除侧向环境噪音

Long sound collecting pipe design effectively eliminate the lateral ambient noise

产品特性 (Features):


- 无与伦比的离轴抑制性能，能在复杂的环境中定向拾取微弱的声音信号
- 采用先进的共模抑制低噪声放大器，具有极高的信噪比
- 采用声干涉拾音原理，长集音管设计，拾音角度很窄，能有效去除侧向环境噪音
- 内置低切滤波器开关，提升人声拾音的清晰度
- 全金属材质屏蔽结构设计，具有出色的抗射频干扰能力
- 配置高级便携皮袋和工程运输铝合金箱
- Unmatched off-axis restraint performance enables to directionally pickup the weak sound signal under the complex environment
- Advanced common mode rejection low noise amplifier features high SNR
- Adopts sound pickup interference principle and long sound collecting pipe design, narrow sound pickup angle effectively eliminate the lateral ambient noise
- Built-in low cut filter switch for more clear vocal sound pickup
- Full metal shielding structure design features excellent RF interference resistance
- Provided with portable leather bag and aluminum carrying case

技术参数 (Specification):

- | | |
|-----------------------|----------------------------------------|
| • 产品类型：采访麦克风 | • Product Type: Interview Microphone |
| • 指向性：超心型 | • Polar Pattern: Hypercardioid |
| • 单元直径：Φ24mm | • Driver Diameter: Φ24mm |
| • 产品阻抗：100Ω | • Output Impedance: 100Ω |
| • 频率响应：10Hz~25kHz | • Frequency Response: 10Hz~25kHz |
| • 灵敏度：-36±3dB at 1kHz | • Sensitivity: -36±3dB at 1kHz |
| • 接驳插头：公母卡侬 | • Cable Connector: Male and female XLR |
| • 产品重量：268g | • Net Weight: 268g |
| • 产品颜色：黑色 | • Color: Black |


使用说明 (Operating Instruction):

SGC-1000PRO 可使用48V幻象电源或含有48V电源的摄像机和调音台供电
SGC-1000PRO is powered by 48V phantom power or camera/console with 48V phantom power

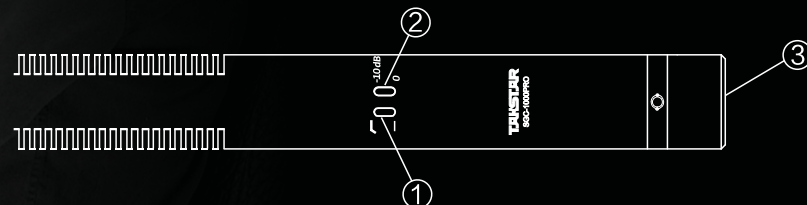

1. 将麦克风电缆的XLR-3插头（带孔头）插入麦克风的XLR-3插头（带针头）③内
 2. 将麦克风电缆的插头与幻象电源或带有48V电源的摄像机和调音台连接，并打开电源开关
 3. 低切滤波开关①：当开关推至“-”为开机正常工作，当开关推至“~”为开机并且打开低切滤波功能
 4. 拾音灵敏度开关②：“0dB”为正常拾音状态，“-10dB”为拾音灵敏度衰减，适用于近距离拾音
1. Plug the XLR-3 female connector of the microphone cable into the microphone XLR-3 male connector
 2. Connect the microphone cable with the phantom power or camera/console with 48V power supply, and turn on the power switch
 3. Low cut filter switch①: push the switch to “-” position, the microphone is turned on and under normal working status; push the switch to “~” position, the microphone is turned on and the low cut function is on
 4. Sensitivity switch②: “0dB” for normal pickup status, “-10dB” for pickup sensitivity attenuation, it is suit for short distance pickup

频率响应图 (Frequency Response):

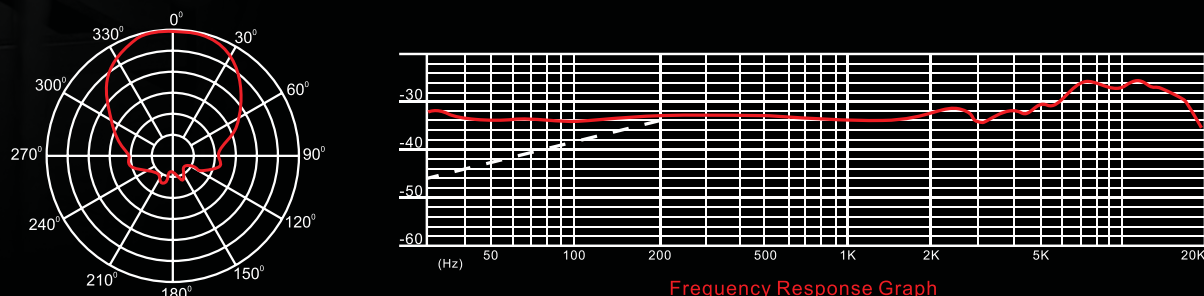

注意事项 (Caution):

1. 电容麦克风灵敏度度高，必须注意不要从高处落下或给予强烈冲击
 2. 电容麦克风不使用时应存放在干燥清洁的地方，避免在温度、湿度过高及强磁场的场所保管或使用，以免影响灵敏度和音色
 3. 使用时请安装上专用防风棉
1. Condenser microphone is with high sensitivity, do not drop from a height or apply strong shock
 2. Keep and store the microphone in the clean and dry place, and do not use it under the high humidity/temperature and strong magnetic field environment to avoid impact on the sensitivity and timbre
 3. Put on the supplied windscreen when using the microphone

适用场合 (Application):

- 适用于舞台、采访、影视制作等场合
- Stage performance, interview, video production

包装清单 (Product Content):

